


Durastroke Pneumatic Actuators

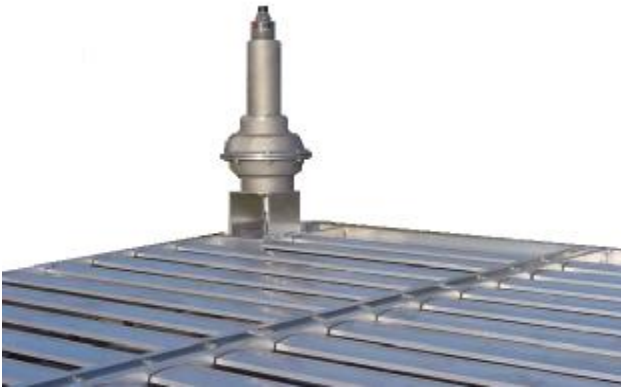

- Heavy Duty Construction
 - Durable Cast Aluminum Housing
 - Available for “extreme duty” temperatures & climates
 - Mounting Versatility
 - Some models available with Fisher DVC Positioner
 - Long life diaphragms
 - Low maintenance
-
- Short Lead Times
 - Competitive Pricing
 - Various spring rates available

AIRTECH Products, Inc.

1550 S. 81st W. Avenue

Tulsa, OK 74127

Phone: 918-241-0264

Fax: 918-241-0270

www.airtechproducts.com

Technical Information

Parameter	Model		
	60 Series	120 Series	1000 – 2000 Series
356-T6 Alum Housing	yes	yes	yes
303 S.S. Travel Stem	yes	yes	yes
Piston	356-T6 Alum	356-T6 Alum	NA
Includes Clevis	yes	yes	yes
Clevis Material	Zinc Plate	Zinc Plate	6061-T6 Alum
Diaphragm	Polyester Fabric w/Nitrile		Nitrile / EPDM
Available Force			320 #
3-15 Spring	18# (20 psi)	36# (20 psi)	NA
6-30 Spring	36# (40 psi)	72# (40 psi)	NA
Stem Travel	4"	6"	3.5"
Consumption (full stroke)	.01 scfm	.03 scfm	.5 scfm
At positioner		.3 scfm (40 psi)	.25 scfm
Air Requirements			
3-15 Spring	20 psi	20 psi	NA
6-30 Spring	40 psi	40 psi	50 psi
Weight			
With positioner	8.25 #	14.75 #	44 #
Without positioner	6.25 #	12.75 #	42 #
Spring	Zinc Plate	Zinc Plate	17-7 SS
Extreme duty available	Optional	Optional	Optional
Use w/Air or Sour Gas	yes	yes	Optional
Lubrication Required	no	no	no

Airtech Products, Inc., 1550 S. 81st W. Avenue, Tulsa, OK 74127

Phone: 918-241-0264, Fax: 918-241-0270

www.airtechproducts.com